
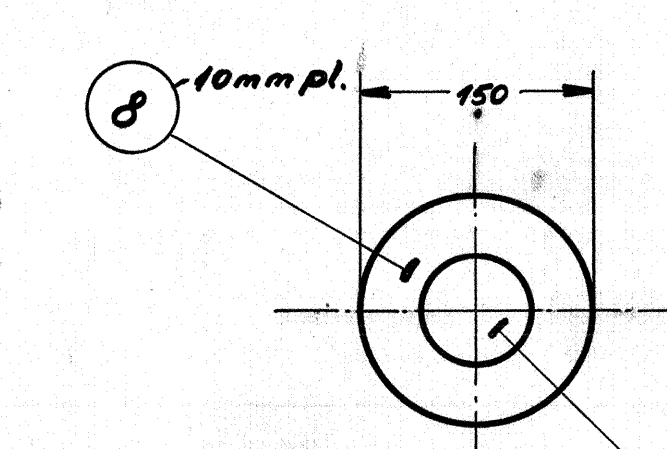


Angaaende placering se 18W-22.050

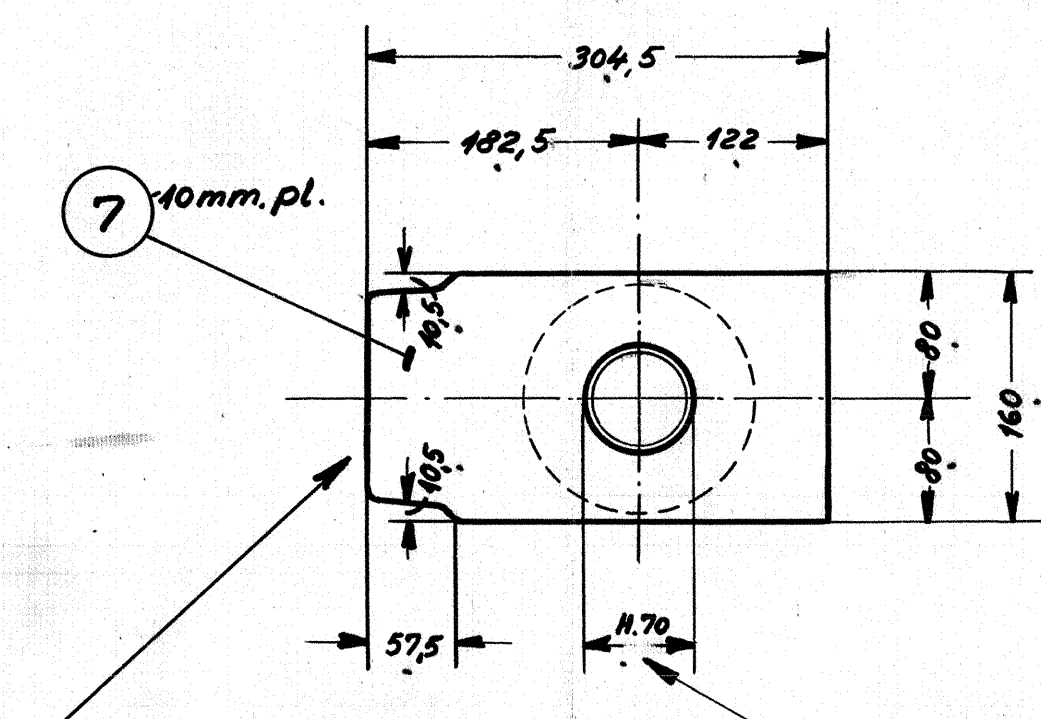

tilpasses efter pos. 5

hul bores efter sammensvejsning af pos. 7 og 8

1	bøsning A 60/70 x 30 n.bl. 254	10	se stkl.	6995/13	
2	afstivning fj. 65 x 8	9	st. 37	200	
2	ring 10mm.pl.	8	-	320 x 160 x 10	
1	10mm.pl. til leje	7	-	315 x 170 x 10	
1	13mm.pl. til leje	6	-	250 x 170 x 13	
1	160 x 65 x 75 x 10,5	5	-	250	
1	vinkejern 100 x 100 x 12	4	-	155	
1	- 65 x 65 x 7	3	-	345	
1	- 75 x 75 x 8	2	-	2255	
1	vinkejern 75 x 75 x 8	1	st. 37	1970	
Stk.	Betegnelse	Pos.	Materiale kvalitet	Model nr. eller materiale størrelse	rea. vægt/stk.
Tegn. E.L. 14/12-50 Rev. E.P. 14/3 SJ 194. II L				Maalestok: 1:10 1:5	
Kalk. B.F. 14/3-51 Norm. Dato				Dato	
Dato				Indtekt	
14/3 ny tegn. pos 2 og 9 ændret csk a				Indtekt	
Anvendelse			Stykliste nr.		
Diesel-el. 500/550hk. motorvogn			6984.		
Tegningens betegnelse			Tegningens nummer		
Fast punkt til bremsearm for motorbogje.			18W-22.056.		
Indtekt			Indtekt		