


Ang. placering se 304L-20.610 og 304L-20.620

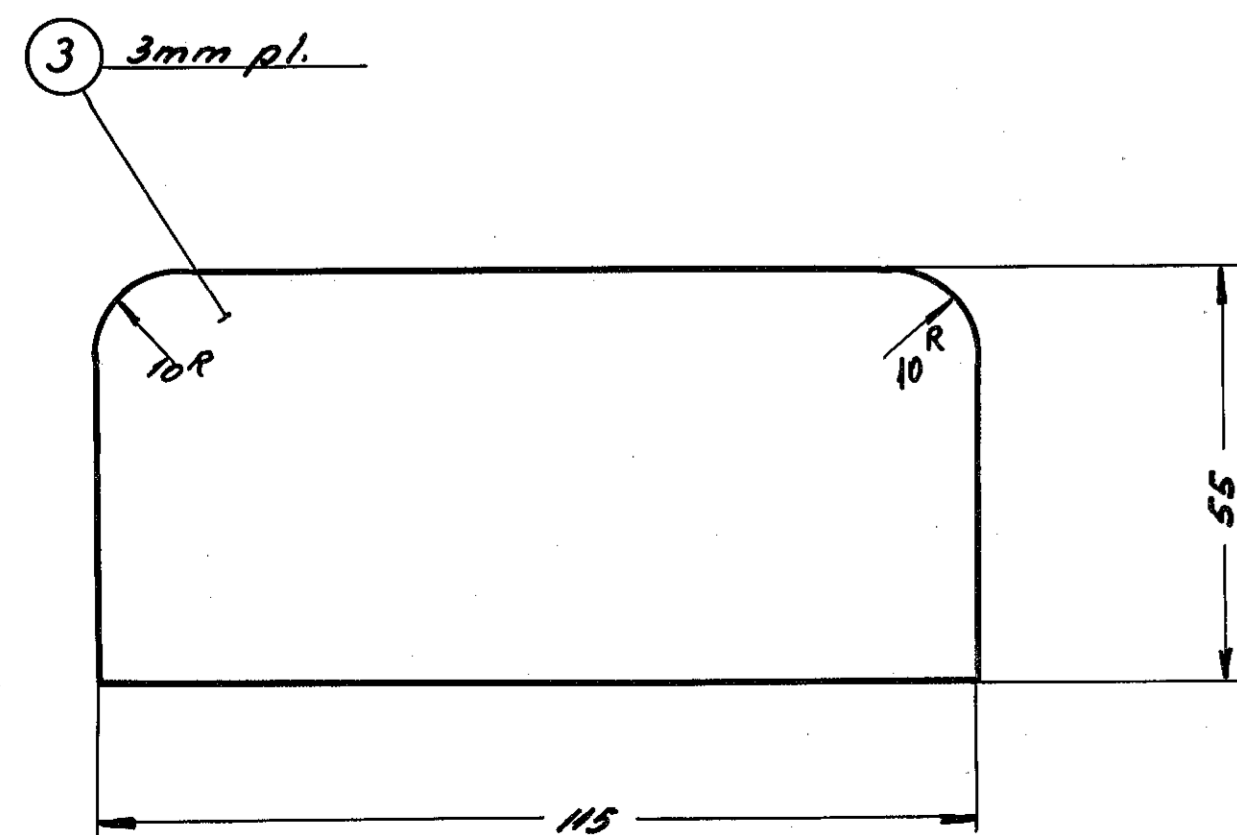

Samtlige svejdesømme 3mm svejdes olietæt.

6	stålånl 1,5" x 140 (til vinterolie)	10	hærdet bronze	1,5" x 900	
6	løgning 26" x 2	9	oaken cork	magasin	
6	stålånl 1,8" x 140 (til sommerolie)	8	hærdet kobber	1,8" x 900	
6	lukkeskrue	7	autom. stål	26" x 200	
6	lukkeskrue	6	messing	14" x 150	
6	gevindbøsning	5	st. 00	26" x 100	
6	udløbsbøsning	4	"	16" x 400	
12	plade 115 x 55 x 3	3	"		
6	plade 46 x 221 x 3	2	"	pl. 400 x 700 x 3	
6	plade 55 x 130 x 3	1	st. 00		
Silk.	Betegnelse	Pos.	Materiale kvalitet	Model nr. eller materiale størrelse	nr. i ordreg. Vægt/stk.
Tegn. 10.17-p-53	Rev. F.S. 25-7-54	Hol.			
Kalk. 75.20-154	Norm.	Dato		Målestok: 1:1	
Dato	Reviser	Dato			
			FRICHS		
Anvendelse			Stykliste nr.		
Diesel-mek 167/183 hk. ranger-tractor.			9801.		
Tegningens benevnelse			Tegningens nummer		
Nålesmøreapparat.			304L-20.640		
			Indlæs:		