



Snit B-B

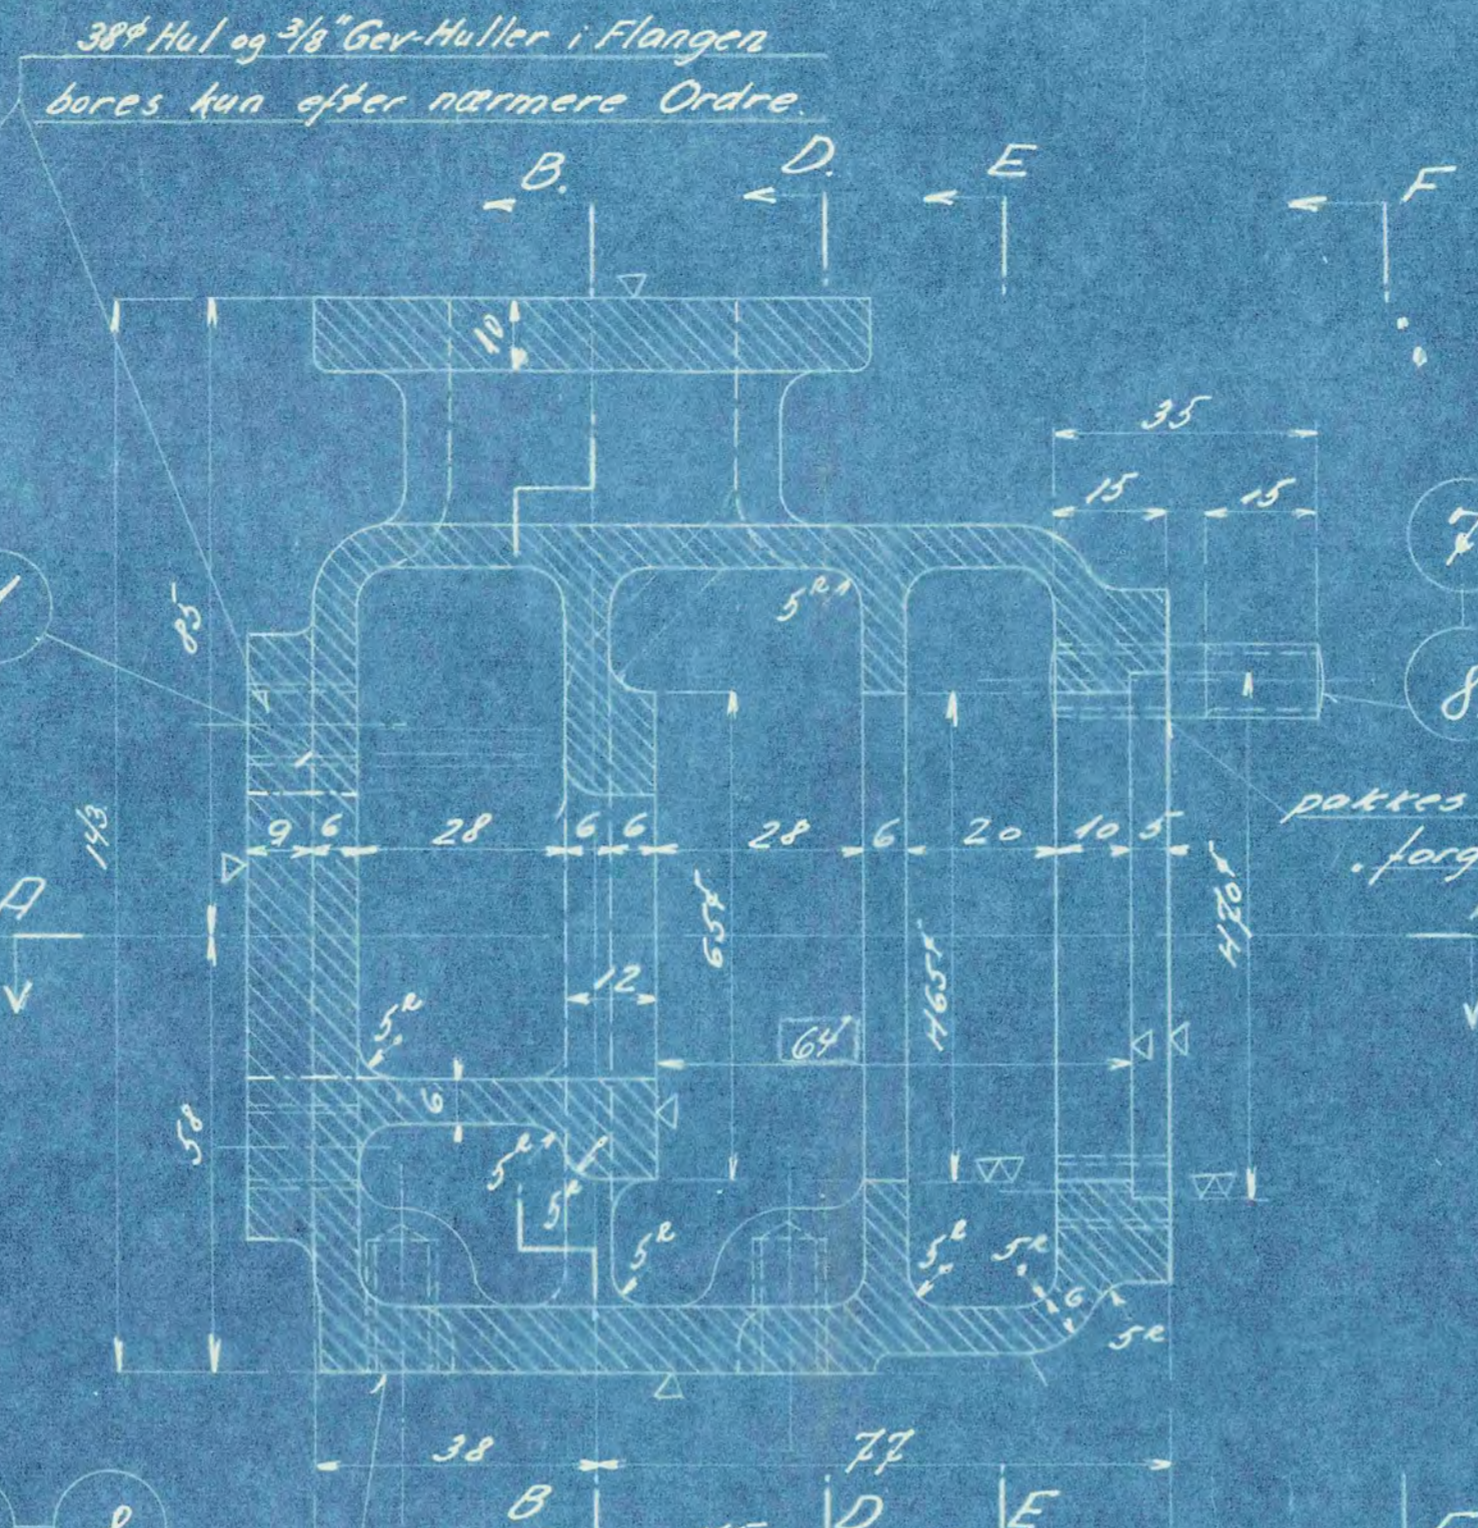


3/8" Gev 18 dyb. maa ikke gennembores.

Snit C-C

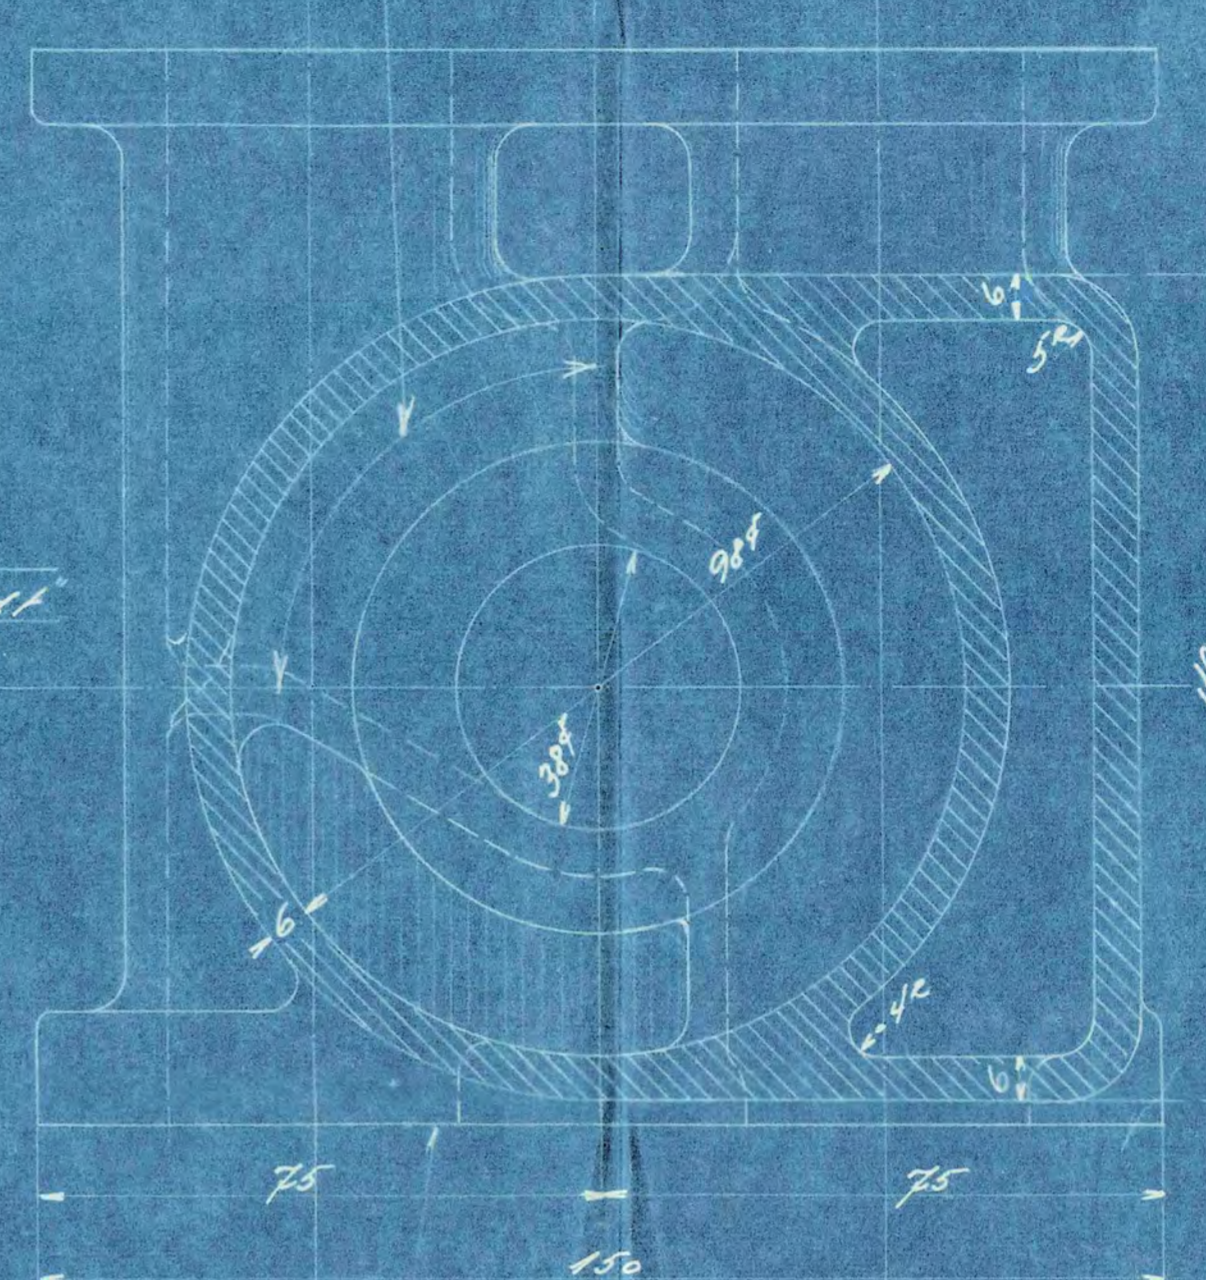


Snit D-D


G - Snit G-G se Plan II

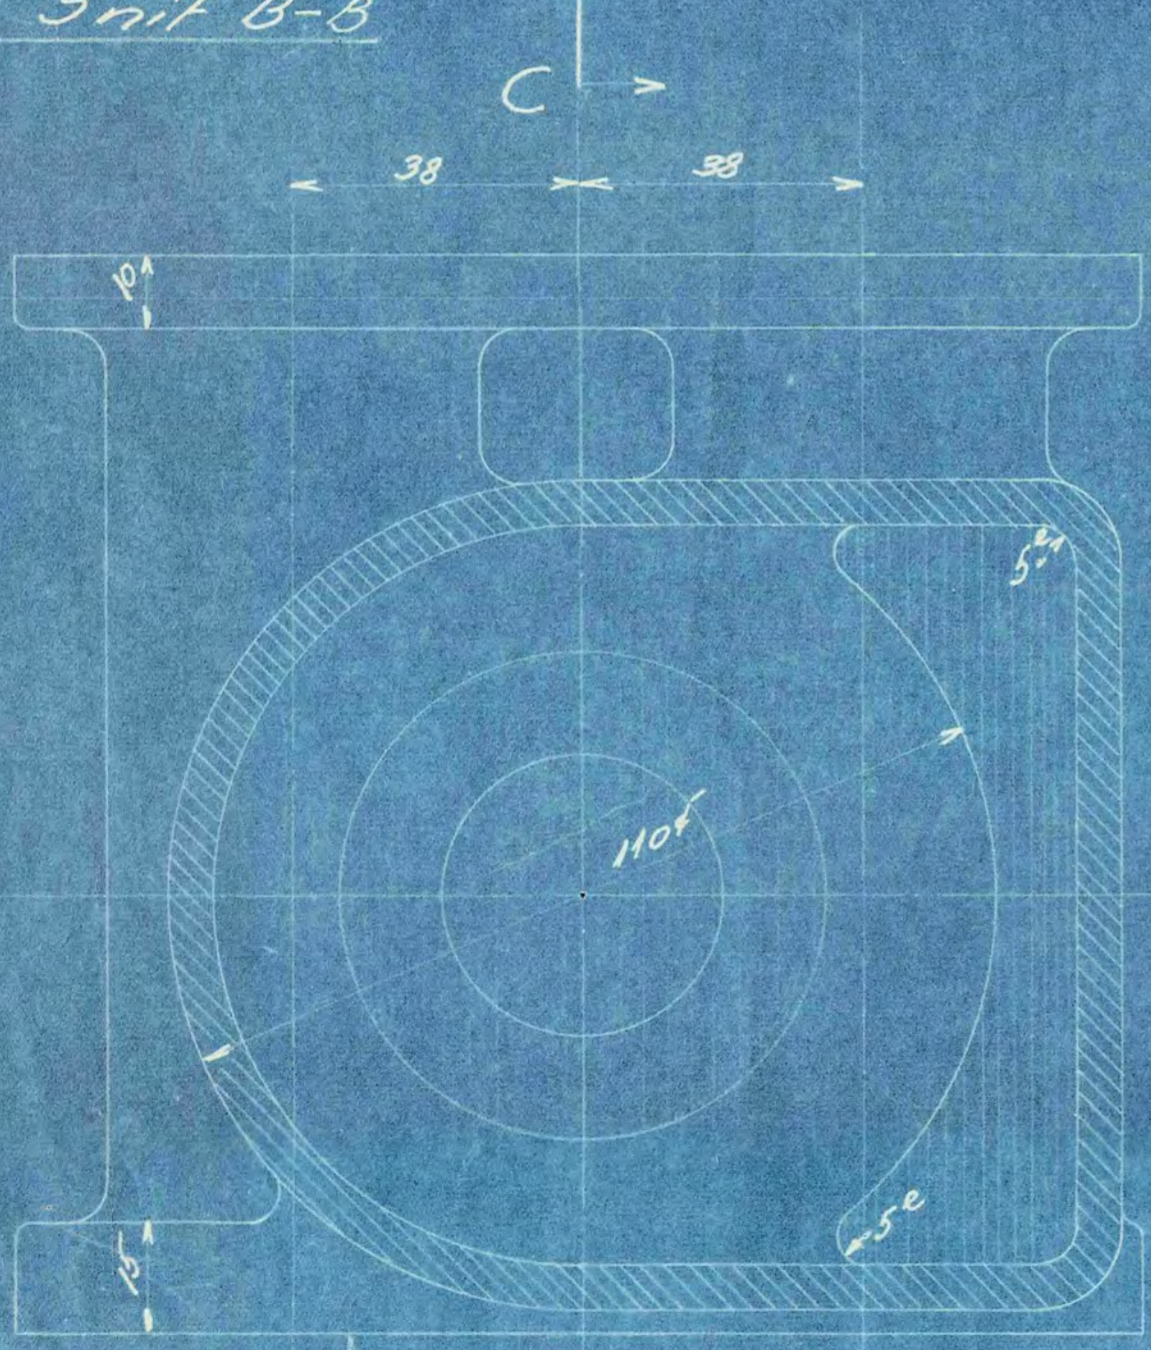

Snit E-E

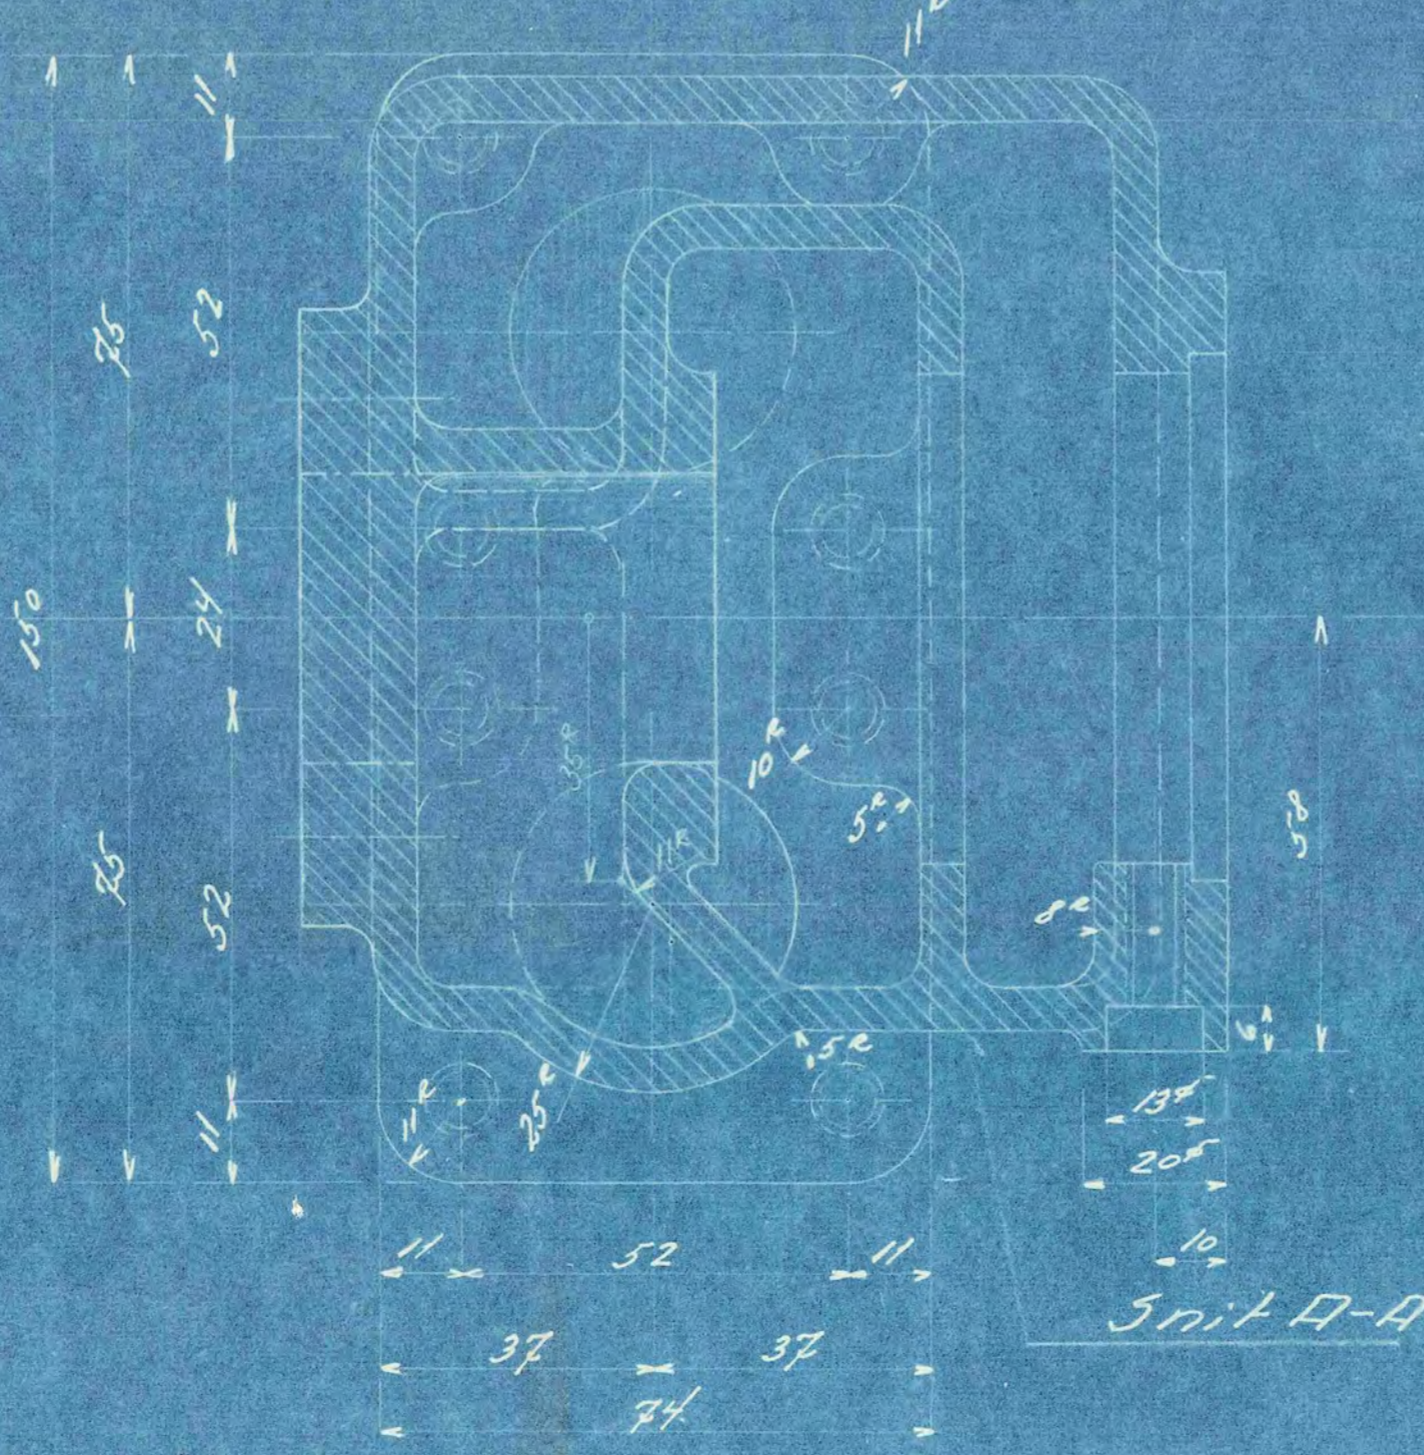

Snit A-A

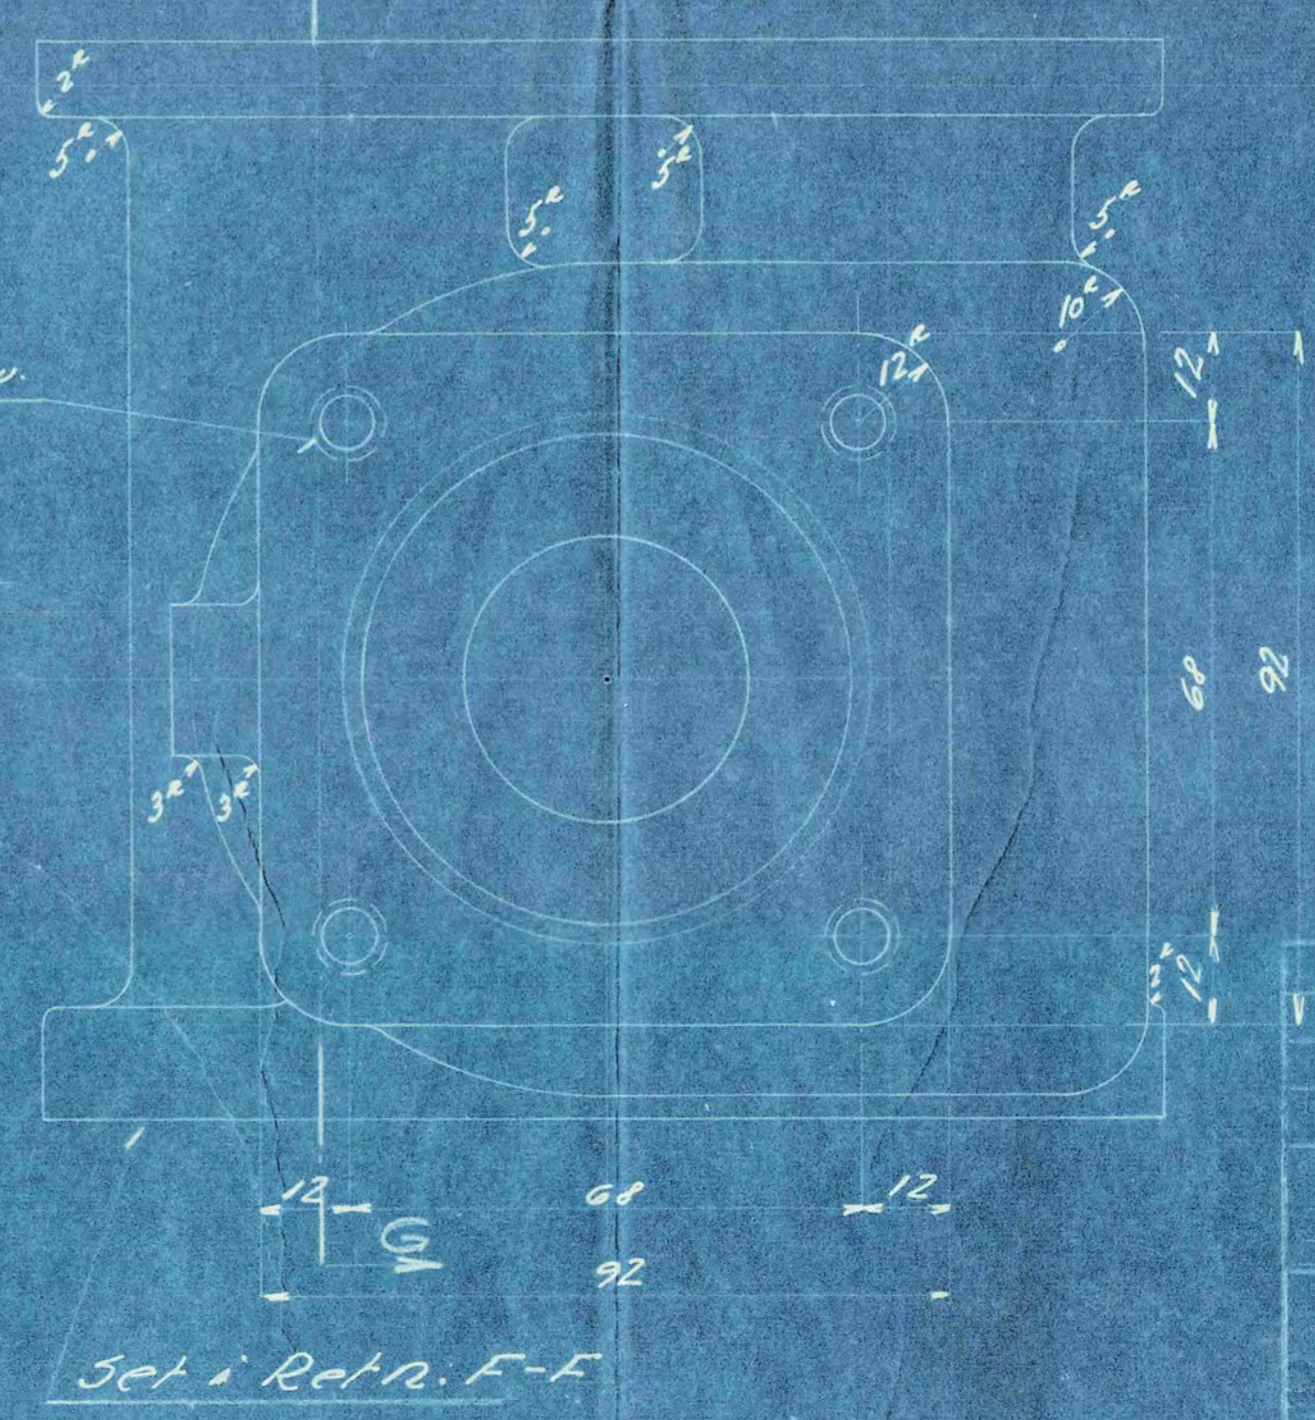

Set i Retr. F-F

STYK	STYK	BETEGNELSE	MATE	STYK	PR
1	1	Ventilhus.	brons	626C	13.65
2	1	Dæksel	"	"	13.65
3	1	Cylinder	Forfar brons	621C	13.65
4	1	Ventilglider	0.30 staa	2 1/2 x 1 1/2	
5	1	Sikringskrue	1/2 staa	1/2 x 3/8	
6	1	Pakning	12 1/2 x 1 1/2	20 x 20 x 1	
7	12	Tappe	3/8 x 35 staa	3/8 x 1/80	
8	12	Hørlrik	3/8		Magas.
9	1	Mellemlæg	1/2 x 2 1/2	1/2 x 2 1/2	
10	1	do	1/2 x 1	1/2 x 1	
11	2	do	1/2 x 2 x 5	10 x 50 x 95	
12	1	Fjeder	40 x 170 x 5 1/2 18 lød	staa	10000

DATE: FORANDRINGER: INDEKS:

A/S FRICH'S AARHUS

Dieselmotor 6260CL

Reguleringsvent. f. Trykstr. led

PROJENT AF: Palm.	MAALSTYK:	TEGNINGS NR.:
REVIDENT AF: 26-7-32.	1:1	626C 13.65.
INDEKS TIL TEGNINGS NR.		a

Plan I