


	Betegnelse	Bemærkning
1	trykssmørepumpe	4185 CF - 13.08
2	trykssmøreledninger	4185 CF - 13.15a
3	trykssmørefilter	4185 CF - 13.17
4	sugefilter	12G - 464a
5	overstrømningsventil	4185 CF - 13.32
6	skrueaaq for sugefilter	4185 CF - 2.54
7	dæksel med paafyldefilter	6185 CF - 2.65
8	oliestandsviser	4185 CF - 1.26
9	kontaktapparat "Danfos" T.F.F.	4185 CF - 18.69a
10	selvluukkende ventil for vippetøjs-smøring	60V - 12
11	kontraventil	4185 CF - 13.61
12	aftapningshane	1 1/2"
13	smøreoliemanometer	4185 CF - 70.08
14	magnet for stop	9Z - 97v
15	oliekøler	304L - 25.520
16	ventilator	304L - 25.730
17	regulator	5C - 4a 15e
18	skiftehane for oliekoeler	V - 484
19	sikkerhedsventil	1CA - 230

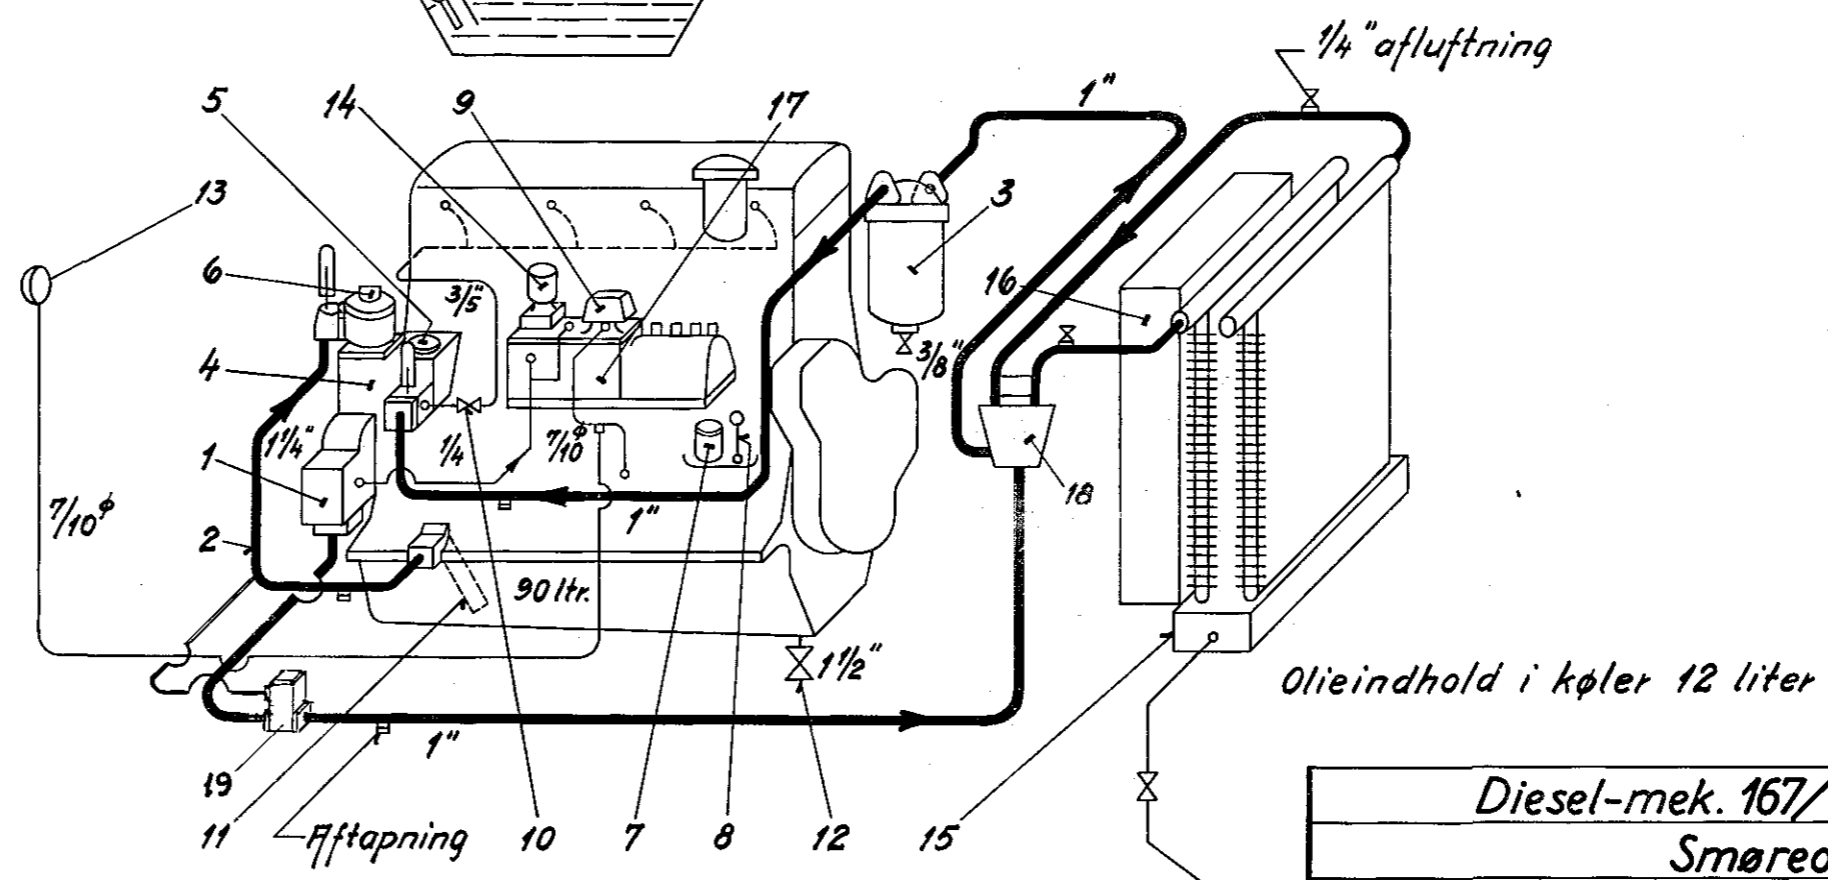

Diesel-mek. 167/183 hk. rangertraktor.			
Smøreoliediagram.			
Dato	Maalstok	Sign.	Tegningens nummer
22/11 1954	~	Fr. N.	304L-16.870.c

Aftapning
 c: Sikkerh.-V. tilf. 2-2-56. Fr.N.
 b: sikkerhedsvent. tilf. 28.10.55. Fr.N.
 a: skiftehane tilf. 28-6-55. Fr.N.

Olieindhold i køler 12 liter