


Technical drawing of a steam locomotive, showing two views: a side elevation (top) and a plan view (bottom).

The side elevation (top) includes dimensions such as 1200, 300, 2150, 1000, 200, 1150, 920, 720, 1000, 1400, 1410, 2030, 2090, 600, 500, 1840, 1040, 6.5t, 6.5t, 6.5t, 1250, 1400, 950, 1800, 850, 420, and 6070. The drawing is labeled "1410" and "2.4 cbm".

The plan view (bottom) includes dimensions such as 600, 1000, 2500, 1200, 2530, 1920, 1150, 2050, 1150, and 600. The drawing is labeled "1410" and "2.4 cbm".

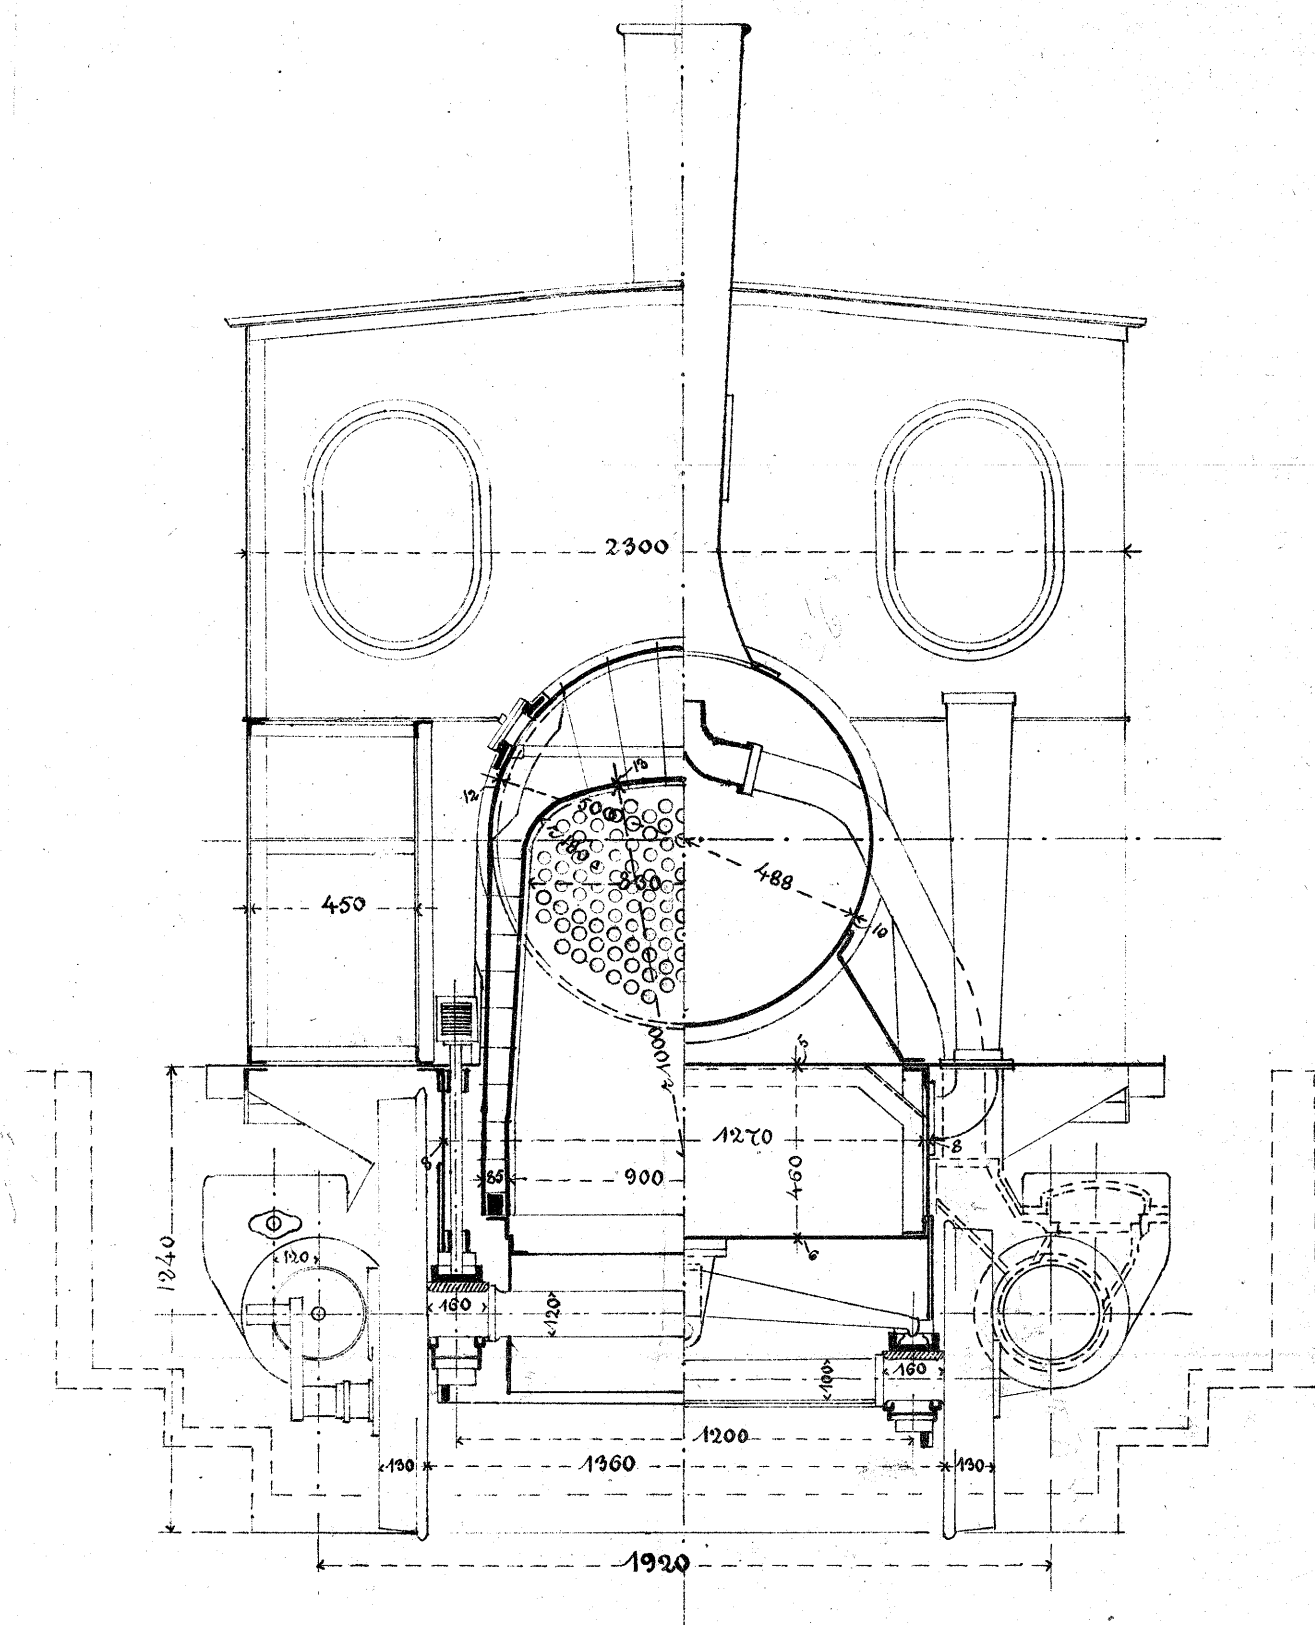



$\frac{1}{20}$ d. nat. Exps.

Gewicht betriebsfähig. . 19 Tonnen.

Odessa den 20/10 1903.

2.4 Anterior Vortex
0.7 Posterior Vortex

801 k.

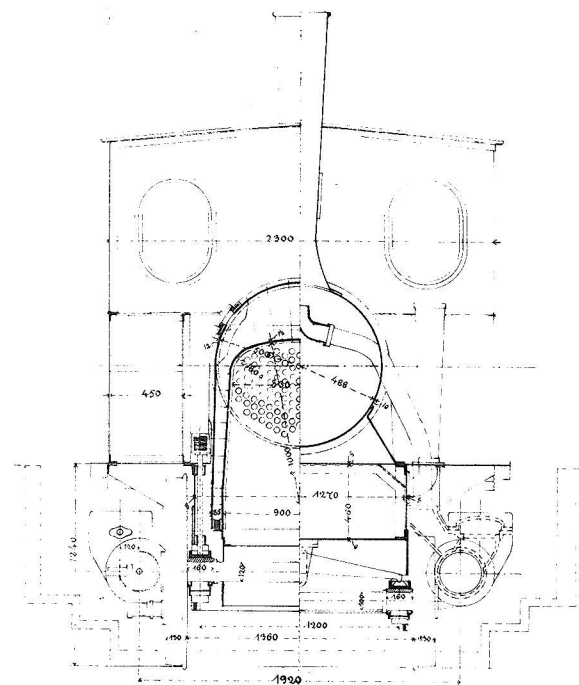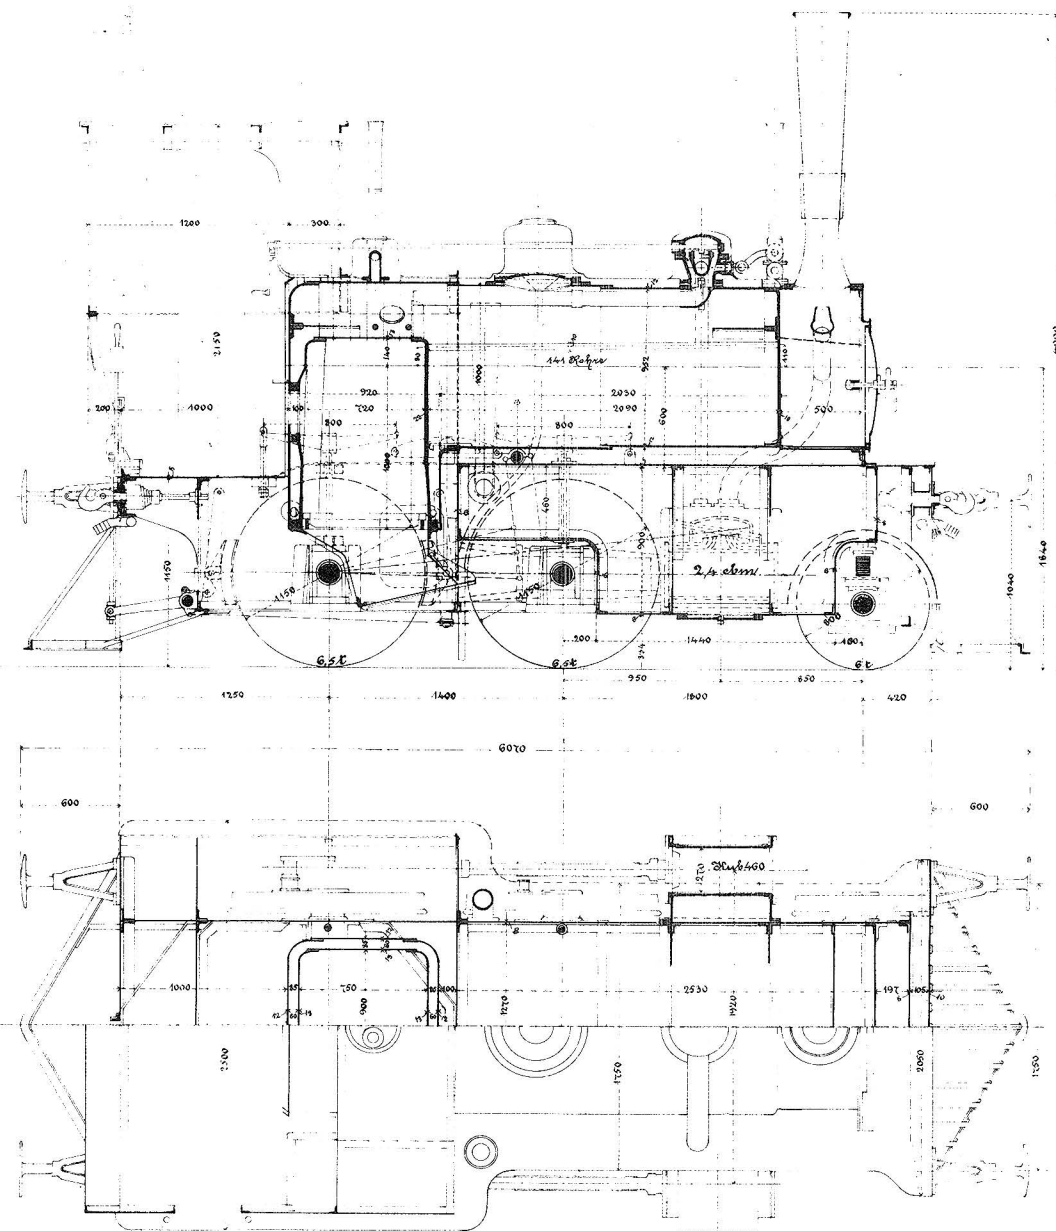

Leichte Locomotive. (1 og 2)

$\frac{1}{2}$ d. nat. Grøss.

Leistung 120 Hester k.

Heizfläche (aussen) . . 40 qm.

Rostfläche 0,55 qm.

Dampfdruck 12 atm.

Besicht betriebsfähig . 19 Tonnen.

Bilag til Skema til
Dr. C. F. Schlichter, Kbhvn.

$\frac{2}{10}$ 1803.